


# CANTON ALLIGATOR SHEARS

# 44A

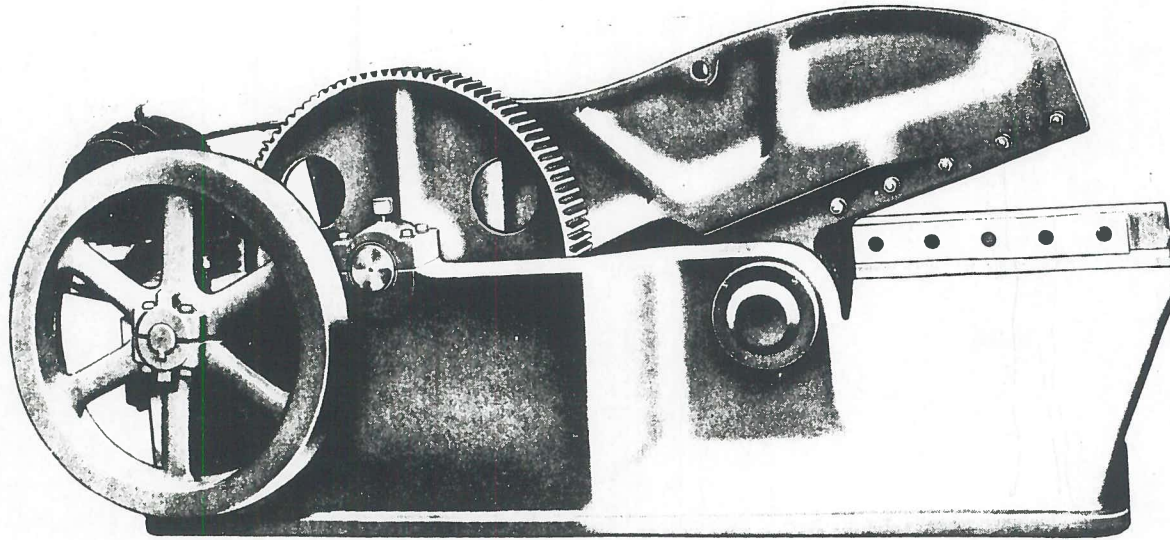

## SPECIFICATIONS

<b>CAPACITY</b> . . . . .	4 1/4" rounds or 1" x 30" or equivalent mild steel.
<b>WEIGHT</b> . . . . .	Approximately 24,000 lbs. for complete shear. Requires no foundation.
<b>MOTOR AND DRIVE</b> . . . . .	15 H.P., 220/440 v., 60 cy., 3 ph., A.C. at 1200 r.p.m. Drive is V-flat belts from grooved motor sheave to flat face flywheel.
<b>CUTS PER MINUTE</b> . . . . .	Twenty-five. Fast production on heavy material.
<b>KNIVES</b> . . . . .	24", 30" or 36" long, 5" deep and 2" thick. Mounted on adjustable knife seat. No shimming required.
<b>JAW OPENING</b> . . . . .	Eight inches with 24" knives, nine and one-half inches with 30" knives, 11" with 36" knives.
<b>FLOOR SPACE</b> . . . . .	Approximately 4'6" x 14'6".
<b>BUSHINGS</b> . . . . .	Bronze bushed throughout on kingpin, crankshaft, countershaft and Pitman arm.
<b>STYLE</b> . . . . .	High or low knife, right or left hand.

Another fine product from:

**GENSCO EQUIPMENT CO. LTD.**

53 Carlaw Ave., Toronto, Canada M4M 2R6 • Tel. (416) 465-7521 • Telex: 065-24770

Specialists in Scrap Handling and Processing Equipment for Over 60 Years