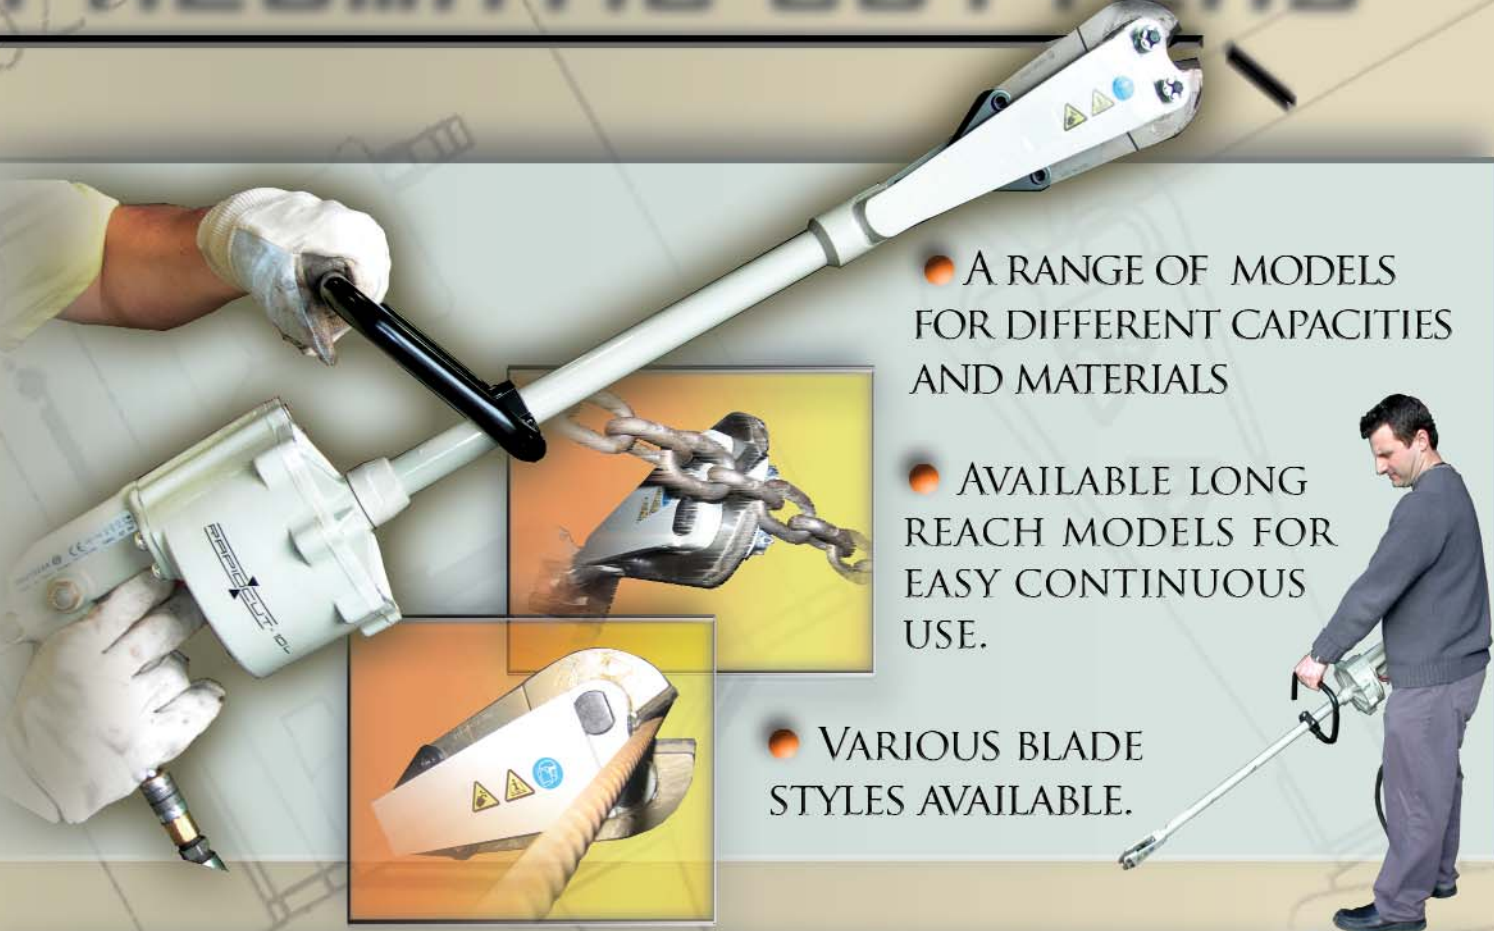


**GENSCO****RAPIDCUT****PNEUMATIC CUTTERS**

- A RANGE OF MODELS FOR DIFFERENT CAPACITIES AND MATERIALS

- AVAILABLE LONG REACH MODELS FOR EASY CONTINUOUS USE.

- VARIOUS BLADE STYLES AVAILABLE.

The new **RAPIDCUT** pneumatic cutters offer a fast clean cut with an absolute minimum of operator effort. Use the long handle versions to reduce operator bending and easily reach into awkward spots for cutting. Countless industrial applications cutting high tensile wire and rod, wire mesh, strand and rebar. Three standard models, each available with various blade configurations, plus long and short versions. The RAPIDCUT tools offer minimum weight, almost no maintenance, and the lowest cutting time.



Since 1919

**GENSCO****GENSCO AMERICA, INC.**

5307 Dividend Dr., Decatur, Georgia 30035 ● Tel: 770 808-8711 ● Fax: 770 808-8739

**GENSCO EQUIPMENT (1990) Inc**53 Carlaw Ave., Toronto, Canada M4M 2R6 ● Tel: 416 465-7521 ● Fax: 416 465-4489  
email: info@genscoequip.com ● url: www.genscoequip.com**ACROSS USA 800 268-6797**

<b>RAPIDECUT -6</b>	LENGTH (approx.)	WEIGHT	CAPACITY (ON HIGH TENSILE WIRE)	CAPACITY (ON MED. TENSILE WIRE)
6	18" 448mm	7lbs 3.2KG	4mm	6mm
6L	35" 880mm	8lbs 3.8KG	4mm	6mm

<b>RAPIDECUT -8</b>	LENGTH (approx.)	WEIGHT	CAPACITY (ON HIGH TENSILE WIRE)	CAPACITY (ON MED. TENSILE WIRE)
8	20" 500mm	13lbs 5.8KG	6mm	8mm
8-L	36" 900mm	16lbs 7.2KG	6mm	8mm
8-XL	44" 1100mm	19lbs 8.7KG	6mm	8mm
8-LGR	84" 2100mm	26lbs 12KG	6mm	8mm

<b>RAPIDECUT -10</b>	LENGTH (approx.)	WEIGHT	CAPACITY (ON HIGH TENSILE WIRE)	CAPACITY (ON MED. TENSILE WIRE)
10-C	26" 660mm	16lbs 7.5KG	7mm	10mm
10	30" 760mm	18lbs 8KG	7mm	10mm
10-L	38" 960mm	19lbs 8.5KG	7mm	10mm

<b>RAPIDECUT -12</b>	LENGTH (approx.)	WEIGHT	CAPACITY (ON HIGH TENSILE WIRE)	CAPACITY (ON MED. TENSILE WIRE)
12	26" 640mm	22lbs 10KG	8mm	12mm
12-L	38" 940mm	26lbs 12KG	8mm	12mm
12-HD	26" 645mm	22lbs 10KG	8mm or 1/2" STRAND (7x4Ø)	12mmØ
12-LHD	38" 945mm	26lbs 12KG	8mm or 1/2" STRAND (7x4Ø)	12mmØ

<b>RAPIDECUT -16</b>	LENGTH (approx.)	WEIGHT	CAPACITY (ON HIGH TENSILE WIRE)	CAPACITY (ON MED. TENSILE WIRE)
16	46" 1164mm	40lbs 18KG	12mm or 5/8" STRAND (7x5Ø)	16mmØ

\*Capacity measured on medium tensile wire (98,000 PSI / 70kg/mm<sup>2</sup>) and high tensile wire (255,000 PSI / 180kg/mm<sup>2</sup>)